



Operating data
Caracteristiques de fonctionnement
Caratteristiche di funzionamento

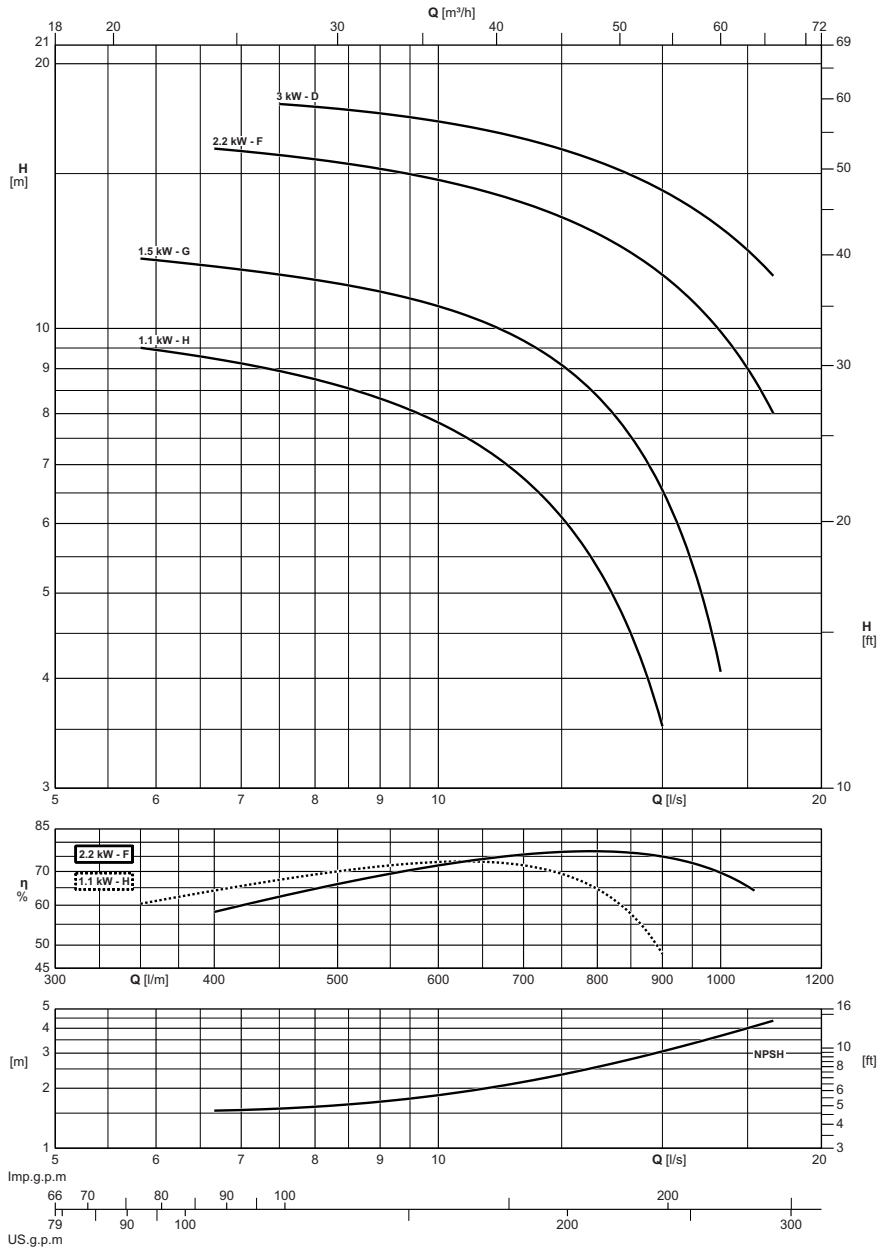

Electric pump type <i>Electropompe type</i> Elettropompa tipo	Motor power <i>Puiss. moteur</i> Potenza motore		DNa x DNm	Capacity <i>Debit</i> Portata													
	[kW]	[CV]		[l/m]	360	420	480	540	600	660	720	780	840	900	960	1020	1080
				[m³/h]	21,6	25,2	28,8	32,4	36	39,6	43,2	46,8	50,4	54	57,6	61,2	64,8
			[l/s]	6	7	8	9	10	11	12	13	14	15	16	17	18	
			Total manometric head <i>Hauteur manometrique totale</i> Prevalenza manometrica totale														
NMCF17H+C20110M211	1,1	1,5	G 2 1/2" x G 2 1/2"	[m]	9,4	9,1	8,7	8,3	7,8	7,2	6,5	5,7	4,6	3,5			
NMCF17H+C30110T211	1,1	1,5	G 2 1/2" x G 2 1/2"	[m]	9,4	9,1	8,7	8,3	7,8	7,2	6,5	5,7	4,6	3,5			
NMCF17G+C30150T211	1,5	2	G 2 1/2" x G 2 1/2"	[m]	12	11,7	11,4	11	10,6	10,1	9,4	8,7	7,7	6,6	5,1		
NMCF17F+C30220T211	2,2	3	G 2 1/2" x G 2 1/2"	[m]		15,9	15,6	15,2	14,8	14,3	13,7	13	12,3	11,5	10,6	9,6	8,4
NMCF17D+C30300T211	3	4	G 2 1/2" x G 2 1/2"	[m]			17,9	17,6	17,2	16,8	16,3	15,7	15,1	14,3	13,6	12,7	11,8
NPSH				[m]		1,6	1,6	1,7	1,8	2	2,2	2,5	2,8	3,1	3,4	3,8	4,2

Overall dimensions and weights
 Dimensions d'encombrement et poids
 Dimensioni di ingombro e pesi

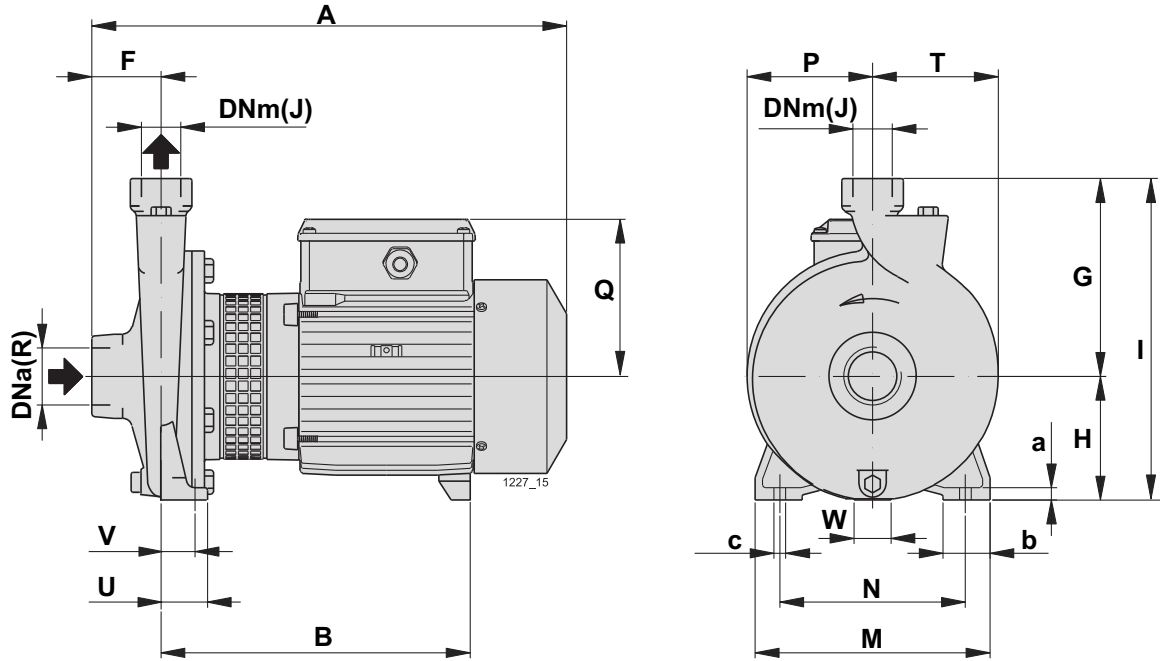

Type Type Tipo	Weight Poids Peso	[mm]																		
		A	B	F	G	H	I	J	M	N	P	Q	R	T	U	V	W	a	b	c
NMCF1A+C20037M211	8,5	261	174	40	132	80	212	G 1"	170	140	76	99	G 1"	81	40	32	20	10	35	9,5
NMCF1A+C20037T211	8,5	261	174	40	132	80	212	G 1"	170	140	76	99	G 1"	81	40	32	20	10	35	9,5
NMCF2S+C20055M211	14,5	309	202	45	150	95	245	G 1"	190	160	87	113	G 1"	90	40	32	19,5	10	35	9,5
NMCF2S+C20055T211	13,2	309	202	45	150	95	245	G 1"	190	160	87	113	G 1"	90	40	32	19,5	10	35	9,5
NMCF2B+C20055M211	13,8	309	202	45	150	95	245	G 1"	190	160	87	113	G 1"	90	40	32	19,5	10	35	9,5
NMCF2B+C20055T211	12,7	309	202	45	150	95	245	G 1"	190	160	87	113	G 1"	90	40	32	19,5	10	35	9,5
NMCF2A+C20075M211	15,2	309	202	45	150	95	245	G 1"	190	160	87	113	G 1"	90	40	32	19,5	10	35	9,5
NMCF2A+C30075T211	15,2	309	202	45	150	95	245	G 1"	190	160	87	113	G 1"	90	40	32	19,5	10	35	9,5
NMCF3C+C20110M211	23,3	377	247	50	180	112	292	G 1"	245	205	111	130	G 1"	114	55	43	31	12	45	11,5
NMCF3C+C30110T211	23,4	377	247	50	180	112	292	G 1"	245	205	111	130	G 1"	114	55	43	31	12	45	11,5
NMCF3B+C30150T211	25	377	247	50	180	112	292	G 1"	245	205	111	130	G 1"	114	55	43	31	12	45	11,5
NMCF3A+C30220T211	28,3	417	287	50	180	112	292	G 1"	245	205	111	130	G 1"	114	55	43	31	12	45	11,5
NMCF6B+C20075M211	17,2	349	234	53	150	100	250	G 1"	190	150	92	113	G 1 1/4"	96	37,5	27,5	19,5	11	38	9,5
NMCF6B+C30075T211	17	349	234	53	150	100	250	G 1"	190	150	92	113	G 1 1/4"	96	37,5	27,5	19,5	11	38	9,5
NMCF6A+C20110M211	19,2	349	234	53	150	100	250	G 1"	190	150	92	113	G 1 1/4"	96	37,5	27,5	19,5	11	38	9,5
NMCF6A+C30110T211	19	349	234	53	150	100	250	G 1"	190	150	92	113	G 1 1/4"	96	37,5	27,5	19,5	11	38	9,5
NMCF10F+C20055M211	19,3	391	247	63	150	100	250	G 1 1/4"	190	140	91	130	G 2"	97	50	35	29	12	50	14
NMCF10F+C20055T211	18,3	391	247	63	150	100	250	G 1 1/4"	190	140	91	130	G 2"	97	50	35	29	12	50	14
NMCF10D+C20075M211	20,6	391	247	63	150	100	250	G 1 1/4"	190	140	91	130	G 2"	97	50	35	29	12	50	14
NMCF10D+C30075T211	18,3	391	247	63	150	100	250	G 1 1/4"	190	140	91	130	G 2"	97	50	35	29	12	50	14
NMCF10A+C20110M211	22,3	391	247	63	150	100	250	G 1 1/4"	190	140	91	130	G 2"	97	50	35	29	12	50	14
NMCF10A+C30110T211	20,8	391	247	63	150	100	250	G 1 1/4"	190	140	91	130	G 2"	97	50	35	29	12	50	14
NMCF10S+C30150T211	21,9	391	247	63	150	100	250	G 1 1/4"	190	140	91	130	G 2"	97	50	35	29	12	50	14
NMCF11B+C30150T211	24,9	403	253	70	170	112	282	G 1 1/4"	210	160	103	130	G 2"	110	50	35	31	14	50	14
NMCF11A+C30220T211	28,9	443	293	70	170	112	282	G 1 1/4"	210	160	103	130	G 2"	110	50	35	31	14	50	14
NMCF12D+C30220T211	31,6	443	295	70	190	132	322	G 1 1/4"	240	190	120	130	G 2"	126	50	35	35	14	50	14
NMCF12C+C30300T211	38	469	294	70	190	132	322	G 1 1/4"	240	190	120	140	G 2"	126	50	35	32	14	50	14
NMCF12A+C30400T211	42,6	469	294	70	190	132	322	G 1 1/4"	240	190	120	140	G 2"	126	50	35	32	14	50	14
NMCF17H+C20110M211	23,8	423	263	80	160	112	272	G 2 1/2"	210	160	96	130	G 2 1/2"	112	50	35	31	14	50	14
NMCF17H+C30110T211	22,9	423	263	80	160	112	272	G 2 1/2"	210	160	96	130	G 2 1/2"	112	50	35	31	14	50	14
NMCF17G+C30150T211	24,3	423	263	80	160	112	272	G 2 1/2"	210	160	96	130	G 2 1/2"	112	50	35	31	14	50	14
NMCF17F+C30220T211	27,8	463	303	80	160	112	272	G 2 1/2"	210	160	96	130	G 2 1/2"	112	50	35	31	14	50	14
NMCF17D+C30300T211	33,7	479	292	80	160	112	272	G 2 1/2"	210	160	96	140	G 2 1/2"	112	50	35	20	14	50	14
NMCF20B+C20075M211	20,9	380	246	53	150	100	250	G 3/4"	190	150	93	130	G 1 1/4"	96	37,5	27,5	29	11	38	9,5
NMCF20B+C30075T211	18,5	380	246	53	150	100	250	G 3/4"	190	150	93	130	G 1 1/4"	96	37,5	27,5	29	11	38	9,5
NMCF20A+C20110M211	22,5	380	246	53	150	100	250	G 3/4"	190	150	93	130	G 1 1/4"	96	37,5	27,5	29	11	38	9,5
NMCF20A+C30110T211	20,9	380	246	53	150	100	250	G 3/4"	190	150	93	130	G 1 1/4"	96	37,5	27,5	29	11	38	9,5
NMCF25B+C20055M211	13,6	313	195	56	140	90	230	G 1"	170	130	85	113	G 1 1/2"	88	37,5	27,5	20	11	38	9,5
NMCF25B+C20055T211	12,5	313	195	56	140	90	230	G 1"	170	130	85	113	G 1 1/2"	88	37,5	27,5	20	11	38	9,5
NMCF25A+C20075M211	14,7	313	195	56	140	90	230	G 1"	170	130	85	113	G 1 1/2"	88	37,5	27,5	20	11	38	9,5
NMCF25A+C30075T211	14,6	313	195	56	140	90	230	G 1"	170	130	85	113	G 1 1/2"	88	37,5	27,5	20	11	38	9,5
NMCF25B+C20110M211	21,2	383	246	56	160	100	260	G 1"	190	150	102	130	G 1 1/2"	102	37,5	27,5	29	11	38	9,5
NMCF25B+C30110T211	20,8	383	246	56	160	100	260	G 1"	190	150	102	130	G 1 1/2"	102	37,5	27,5	29	11	38	9,5
NMCF25A+C30150T211	22,6	383	246	56	160	100	260	G 1"	190	150	102	130	G 1 1/2"	102	37,5	27,5	29	11	38	9,5
NMCF25B+C30220T211	29,7	433	291	63	180	125	305	G 1"	245	200	126	130	G 1 1/2"	126	45	32,5	34	10	45	11,5
NMCF25A+C30300T211	35,9	459	291	63	180	125	305	G 1"	245	200	126	140	G 1 1/2"	126	45	32,5	31	10	45	11,5
NMCF25S+C30400T221	40,6	459	291	63	180	125	305	G 1"	245	200	126	140	G 1 1/2"	126	45	32,5	31	10	45	11,5